
MAIN FEATURES

and example of application

- Intuitive display
- 20 A load output
- Fully programmable via menu
- Optional Wi-Fi accessory
- High power compact design
- Unbeatable price

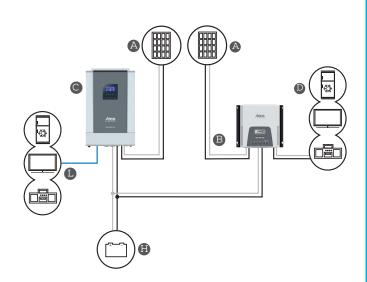

- Solar charge controller Steca Solarix MPPT 5020 Steca Solarix PLI 5000-48
- D Load (48 V DC)
- L Loαd (230 V AC)

H Battery









Steca Solarix MPPT 3020 | 5020



KATEK Memmingen GmbH

87700 Memmingen Germany T +49-(0)8331-8558-0 www.steca.com www.katek-group.de

Mammostraße 1



@stecaelektronik @stecα_elektronik #stecasolar



High power & compact



Product features

- · Maximum Power Point Tracker (MPP-Tracker)
- · High power and efficiency with small dimensions
- · Voltage and current regulation
- Automatic load dis- and reconnection
- Multistage charging technology
- · Monthly equalisation charge

Electronic protection functions

- · Overcharge protection
- Deep discharge protection
- Reverse polarity protection of module, load and battery
- · Automatic electronic fuse
- Short circuit protection
- Open circuit protection without
- Reverse current protection at night
- Overtemperature and overload protection
- · Load disconnection on battery overvoltage

Displays

- Graphical LCD ~for operating parameters, fault messages Operation
- · Simple menu-driven operation
- · Programming by buttons
- · Manual load switch

Interfaces

· Current data is output via RS-

Options

· Interconnectable in parallel or in three phases (parallel kit required)

Certificates

- Compliant with European Standards (CE)
- · RoHS compliant
- · Manufactured according to ISO 9001 and ISO 14001


Steca accessories

· Webportal through PA WiFil

Steca Solarix MPPT are solar charge controllers with maximum power point tracking. These are suitable for all common module technologies and are optimally suited for solar systems with module voltages higher than the battery voltage. In particular, such inexpensive PV modules that are used for grid-connected systems can also be used off-grid

Steca's efficient MPP tracking algorithm always provides the maximum usable power of the module, significantly increasing energy yield, especially in poor weather conditions (cloud cover, winter, diffused light). The Steca Solarix MPPT charge controllers combine state-of-the-art charging technology with high efficiency, professional battery care with numerous programming options, modern design, excellent protection functions and an intuitive LC display with menu guidance.

For remote monitoring, Steca provides the cost-efficient item PA WiFil as an optional accessory.

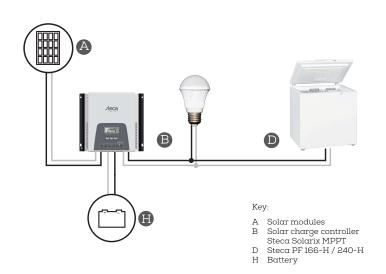

Characterisation of the operating performance			
System voltage	12 V (24 V)	12 / 24 / 48 V	
Nominal power	450 W (900 W)	750 / 1500 / 3000 W	
DC input			
MPP voltage	15 V (30 V) < U _{Modul}	15 V / 30 V / 60 V	
	< 100 V	< U _{Modul} < 150 V	
Open circuit voltage solar module (at	17 V100 V**	17 V / 34 V / 68 V	

(34 V ... 100 V**)

30 A

150 V**

50 A

	DC output			
	Load current	20 A		
	Reconnection voltage (LVR)*	12.5 V (25 V)	12.5 V / 25 V / 50 V	
1	Deep discharge protection (LVD)*	11.5 V (23 V)	11.5 V / 23 V / 46 V	
xble	Battery			
ME	Charge current	30 A	50 A	
l E	End of charge voltage	14.1 V (28.2 V)	14.1 V / 28.2 V / 56.4 V	
programmable	Boost charge voltage	14.4 V (28.8 V)	14.4 V / 28.8 V / 57.6 V	
īd	Equalisation charge	15.0 V (30.0 V)	15.0 V / 30.0 V / 60.0 V	
	Set battery type	liquid		
	Operating conditions			


Fitting and construction				
Dimensions (X x Y x Z)	230 x 130 x 80 mm	250 x 230 x 85 mm		
Weight	1.37 kg	3.14 kg		
Terminal (fine / single wire)	16 mm² - AWG 6	35 mm² - AWG 2		
Degree of protection	IP 20			

Technical data at 25 °C / 77 °F


minimum operating temperature)

Module current

Steca Solarix MPPT 3020



Steca Solarix MPPT 5020



 $^{^*}$ Inverters must not be connected to the load output. * CAUTION: If an open circuit voltage of more than 100 V or 150 V is supplied to the connected solar module, the controller will be destroyed. When selecting the solar module, it is important to bear in mind that the open circuit voltage should never exceed 100 V or 150 V over the entire working temperature.